

DEALERSHIP COPY

shindaiwa®

MASTER PRODUCT
CATALOGUE

2025

AUSTRALIAN DEALER EDITION



WELCOME

For over 70 years Shindaiwa has been creating tools of the highest quality for professionals.

We are now the global leader in production of low emission engines and our industrial power equipment is renowned for its superior quality around the world. This is because pride, skill, dedication and the pursuit of perfection are at the heart of all production and inextricably built into every Shindaiwa tool.

From chainsaws for forestry to heavy duty power generators and welders, you get a product that exceeds expectations and won't let you down.

We receive endless testimonials from commercial customers using our products in nature's harshest landscapes. After years of reliable use, professionals come back to Shindaiwa again and again. So, if you're looking for the highest quality product, that's been designed and built upon the foundations of decades of expertise and passion, then look no further than Shindaiwa.

Hiroshi Kubo
CEO

Yamabiko Corporation
Ohme, Tokyo, Japan


JAPAN TECHNOLOGY

Japan is the spiritual home of technological craftsmanship and continues to lead the world in engineering and manufacturing expertise. Japan has set a global standard where the expectation of customers who buy Japanese products is extremely high. In fact, customers assume that Japanese products will be reliable, well built, dependable, professional and durable. Shindaiwa is all of these.

That is because Shindaiwa is a brand produced by the Yamabiko Corporation, a company that has been behind many 'world first' innovations. These began with the first backpack duster in 1950 and have continued ever since. Our focus is on developing world-class products that are known for their light weight, power and durability. Recently, global markets have begun demanding products with lower exhaust emissions. We have used our technological capabilities to become the global leader in the development of engines with reduced emissions.

Over the years, Yamabiko Corporation has produced over 60 million engines. We currently have manufacturing facilities around the world that all work to the same standard of quality, resulting in consistent, professional-grade products. It is no surprise, then, that our customers worldwide have come to rely on the performance and high quality of all Yamabiko Corporation products.

This craftsmanship extends into manufacturing. Our production philosophy allows us to control the manufacturing processes from the raw materials all the way through to the finished products. We utilise lean manufacturing techniques and the latest equipment to make production more efficient and to maintain our global competitiveness. Our products are assembled using a harmonious marriage of human craftsmanship and state-of-the-art technology, resulting in the highest quality standards.

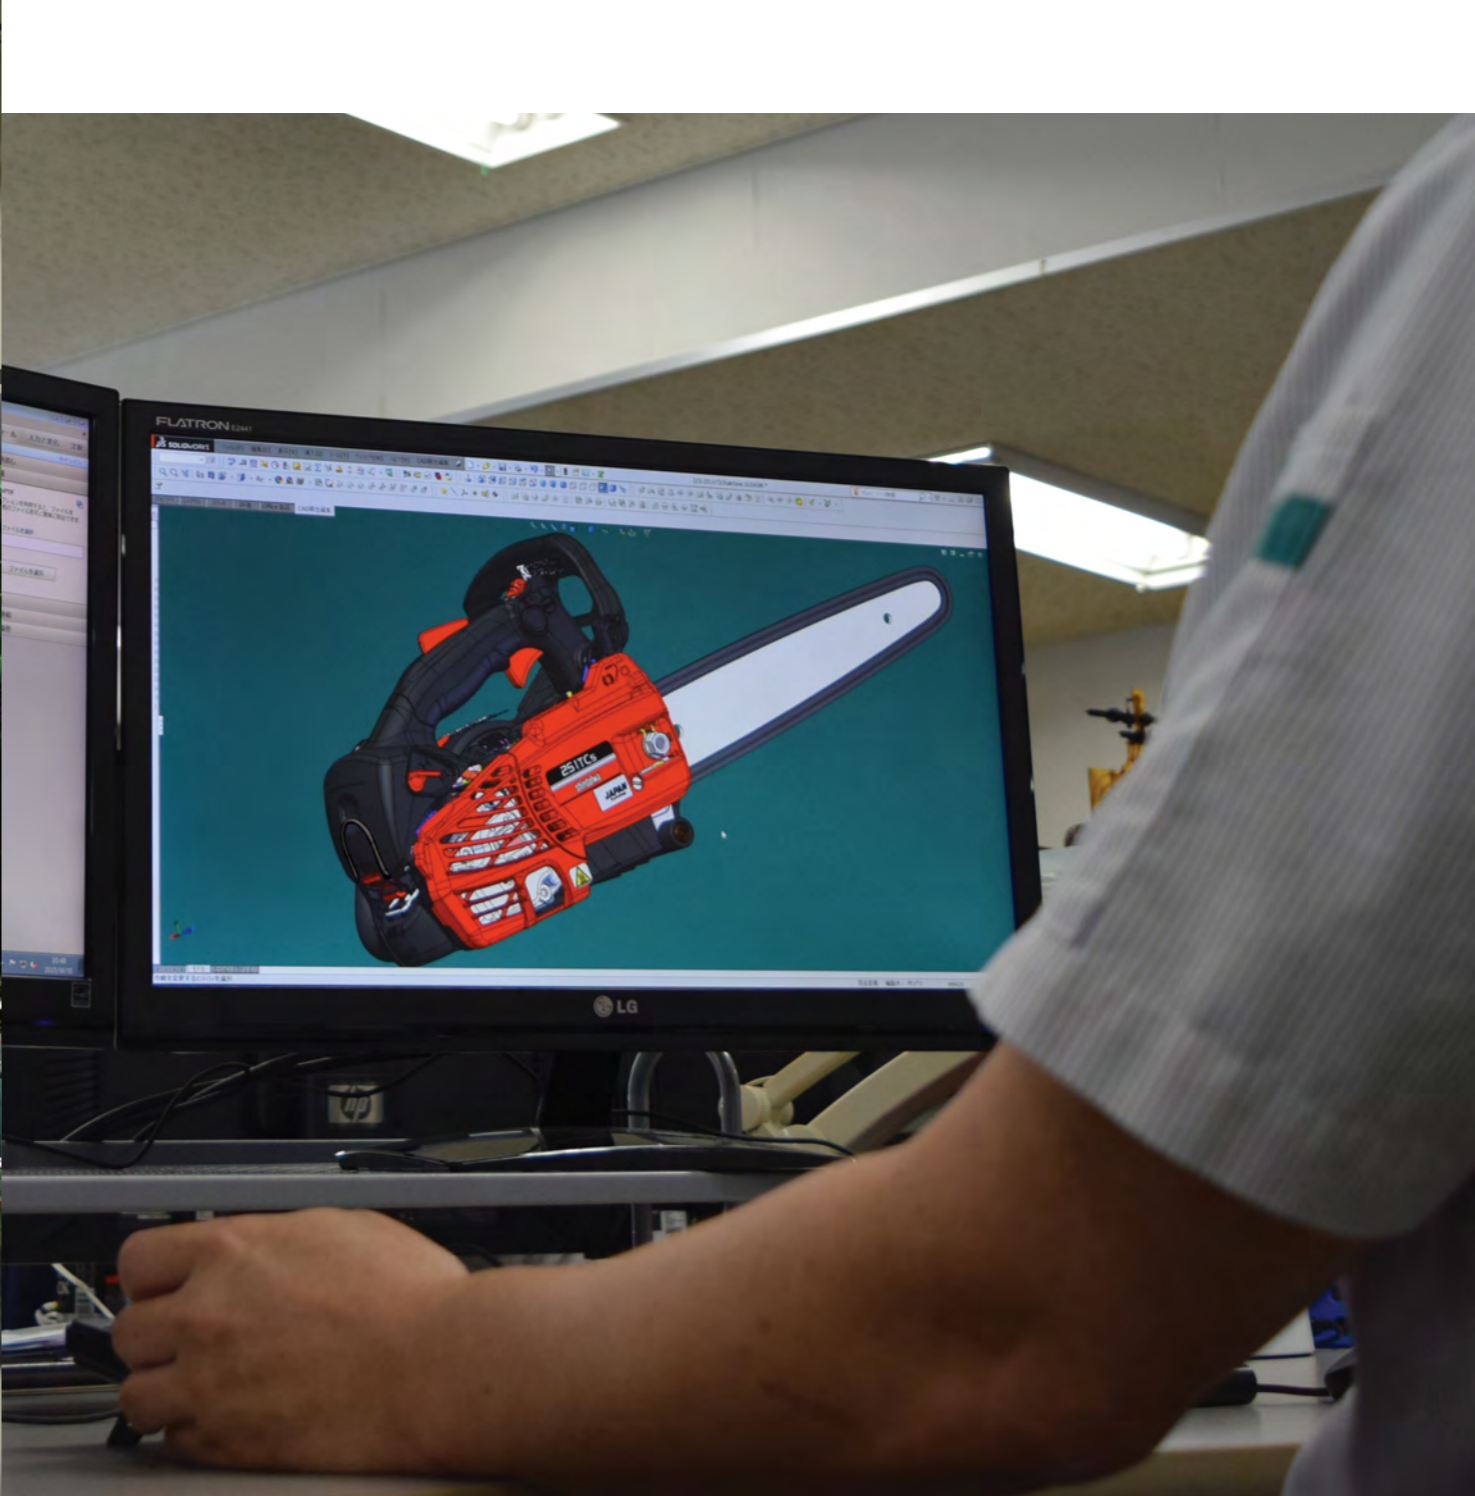

CHAINSAWS	07	BLOWERS	21
Top Handle Chainsaws	09	Handheld Blowers	23
Rear Handle Chainsaws	09	SHRED 'N' VAC®	23
TRIMMERS & BRUSHCUTTERS	11	Backpack Blowers	24
Trimmers & Brushcutters	13	SPRAYERS	25
Curved Shaft Trimmers	14	ACCESSORIES	26
Backpack Brushcutters	14	Chainsaw Accessories	26
HEDGE TRIMMERS	15	Trimmer & Brushcutter Accessories	29
Shafted Hedge Trimmers	18	Hedge Trimmer Accessories	33
POLE PRUNER	18	Pole Pruner Accessories	33
MULTI-TOOL SYSTEM	19	Safety Gear	34
Attachment Specification	20	Blower Accessories	34
		SPECIFICATIONS	35



TRUST SHINDAIWA

5 YEAR DOMESTIC WARRANTY



5 years is a long time. Longer than you'll get from most of the equipment you buy. That's because we stand behind our products. We build professional-grade equipment and are proud of our engineering and manufacturing expertise. As a home owner, you want long-term dependability enjoyed by professionals, and a well-built product that you can buy with confidence.

2 YEAR PROFESSIONAL WARRANTY



Yes, you did read that right. You can have absolute confidence in our equipment. Shindaiwa is designed to be durable and to do what you ask it, wherever you take it. Not only that, our products are built to the highest standards of quality and performance. Our warranty is our statement of confidence and our badge of honour.

100% PROFESSIONAL GRADE



Shindaiwa only builds equipment to one standard – professional. We manufacture products to suit the environment in which they will be used and the job they will be doing, and each piece of equipment is as durable as we can make it. We test our products in punishing conditions to ensure that they are capable of whatever you demand from them. So even if you don't use Shindaiwa equipment professionally, the products you buy are already being used by people who do.

JAPAN TECHNOLOGY



You know that equipment designed in Japan will be reliable. Well-built. Dependable. Professional. Durable. Japan is the home of technological craftsmanship and the nation has won international respect for its manufacturing expertise. This global standard also extends to the equipment we manufacture and we are proud to be counted among those companies that help Japan maintain its reputation for the quality of its engineering and technology.

For more information and terms & conditions please visit shindaiwa-australia.com.au/en_au/support/warranty

CHAINSaws

OVERVIEW

You need a chainsaw that is reliable, durable and professional. Shindaiwa chainsaws are designed to make your job easier. With vibration-reduction systems, easy-access air filters, automatic oilers and inertia chain brakes fitted as standard, we've thought of everything you need to complete the job. First time, every time.



431sx



TOP HANDLE



280Ts
Engine displacement: 26.9cm³ // Output: 1.07kW / 1.46ps //
Dry weight^{*1}: 3.0kg // Bar size: 25cm / 10in

Soft start **Digital CDI** **G-FORCE** **OPTION** **FAST IDLE**



REAR HANDLE



305s
Engine displacement: 30.5cm³ // Output: 1.1kW / 1.5ps //
Dry weight^{*1}: 4.0kg // Bar size: 35cm / 14in

Soft start **Digital CDI** **G-FORCE** **OPTION** **FAST IDLE**



34IAC
Engine displacement: 34.4cm³ // Output: 1.5kW / 2.1ps //
Dry weight^{*1}: 3.8kg // Bar size: 35cm / 14in

Soft start **Digital CDI** **G-FORCE** **OPTION** **FAST IDLE**



362Ws
Engine displacement: 35.8cm³ // Output: 1.5kW / 2.03ps //
Dry weight^{*1}: 3.8kg // Bar size: 35cm / 14in

Soft start **Digital CDI** **FAST IDLE**



43Isx
Engine displacement: 42.9cm³ // Output: 2.3kW / 3.1ps //
Dry weight^{*1}: 4.3kg // Bar size: 45cm / 18in

Soft start **Digital CDI** **G-FORCE** **OPTION** **FAST IDLE**



45Is
Engine displacement: 45.0cm³ // Output: 2.3kW / 3.1ps //
Dry weight^{*1}: 5.0kg // Bar size: 45cm / 18in

Soft start **Digital CDI** **G-FORCE** **OPTION** **FAST IDLE**



50Isx
Engine displacement: 50.2cm³ // Output: 2.57kW / 3.5ps //
Dry weight^{*1}: 4.7kg // Bar size: 45cm / 18in

G-FORCE **OPTION** **FAST IDLE**



60Isx
Engine displacement: 59.8cm³ // Output: 3.2kW / 4.4ps //
Dry weight^{*1}: 6.3kg // Bar size: 50cm / 20in

Digital CDI **G-FORCE** **OPTION** **FAST IDLE**




73Isx
Engine displacement: 73.5cm³ // Output: 4.1kW / 5.6ps //
Dry weight^{*1}: 6.7kg // Bar size: 50cm / 20in

Digital CDI **G-FORCE** **OPTION** **FAST IDLE**

TRIMMERS & BRUSHCUTTERS OVERVIEW

No matter what needs cutting back, Shindaiwa trimmers and brushcutters are trusted the world over. Powerful, easy-starting and ergonomically designed for maximum comfort. So you can work without tiring until the job's finished, because that overgrown brush won't clear itself.

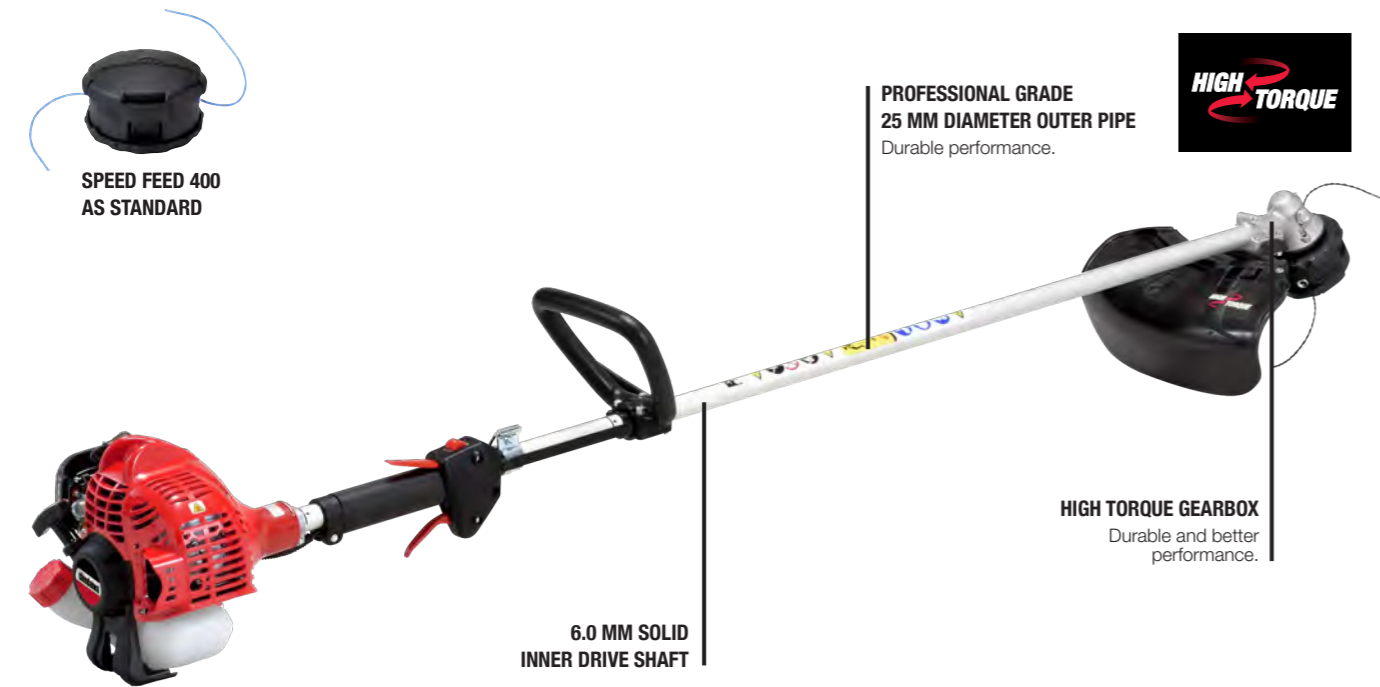

T236TS



TRIMMER & BRUSHCUTTERS



LOOP HANDLE

C226S



T226S



Engine displacement: 21.2cm³ // Output: 0.7kW / 0.97ps // Dry weight^{*1}: 4.9kg (C226S) / 4.5kg (T226S)



T236TS



Engine displacement: 21.2cm³ // Output: 0.71kW / 1.0ps // Dry weight^{*1}: 5.1kg



C263S



T263XS



Engine displacement: 25.4cm³ // Output: 1.0kW / 1.4ps //
Dry weight^{*1}: 5.6kg (C263S) / 5.4kg (T263XS)



C303TS



T303TS



Engine displacement: 30.5cm³ // Output: 1.3kW / 1.8ps //
Dry weight^{*1}: 6.0kg (C303TS) / 5.9kg (T303TS)



Soft start



Digital controlled CDI



Heavy duty air filter



Super anti-vibration system



U handle



Loop handle



C36IT



Engine displacement: 36.3cm³ // Output: 1.4kW / 1.9ps //
Dry weight^{*1}: 6.3kg



B410TS



Engine displacement: 41.5cm³ // Output: 1.8kW / 2.4ps //
Dry weight^{*1}: 8.7kg



B510S



Engine displacement: 50.2cm³ // Output: 2.16kW / 2.94ps //
Dry weight^{*1}: 9.0kg



F226S



Engine displacement: 21.2cm³ // Output: 0.7kW / 1.0ps //
Dry weight^{*1}: 4.3kg


BACKPACK



BP510S




Engine displacement: 50.2cm³ // Output: 2.16kW / 2.94ps //
Dry weight^{*1}: 11.9kg

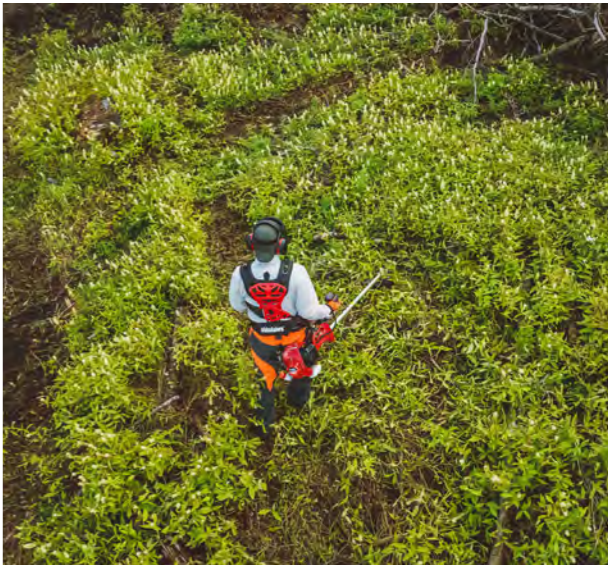

HEDGE TRIMMERS

OVERVIEW

You have the expertise. And Shindaiwa has the power and precision you need to achieve the standards you pride yourself on. Accurate, comfortable and built to last, with vibration-reduction systems, easy-access air filters and a long-lasting blade fitted as standard. For excellent cutting performance and a professional finish. Every time.

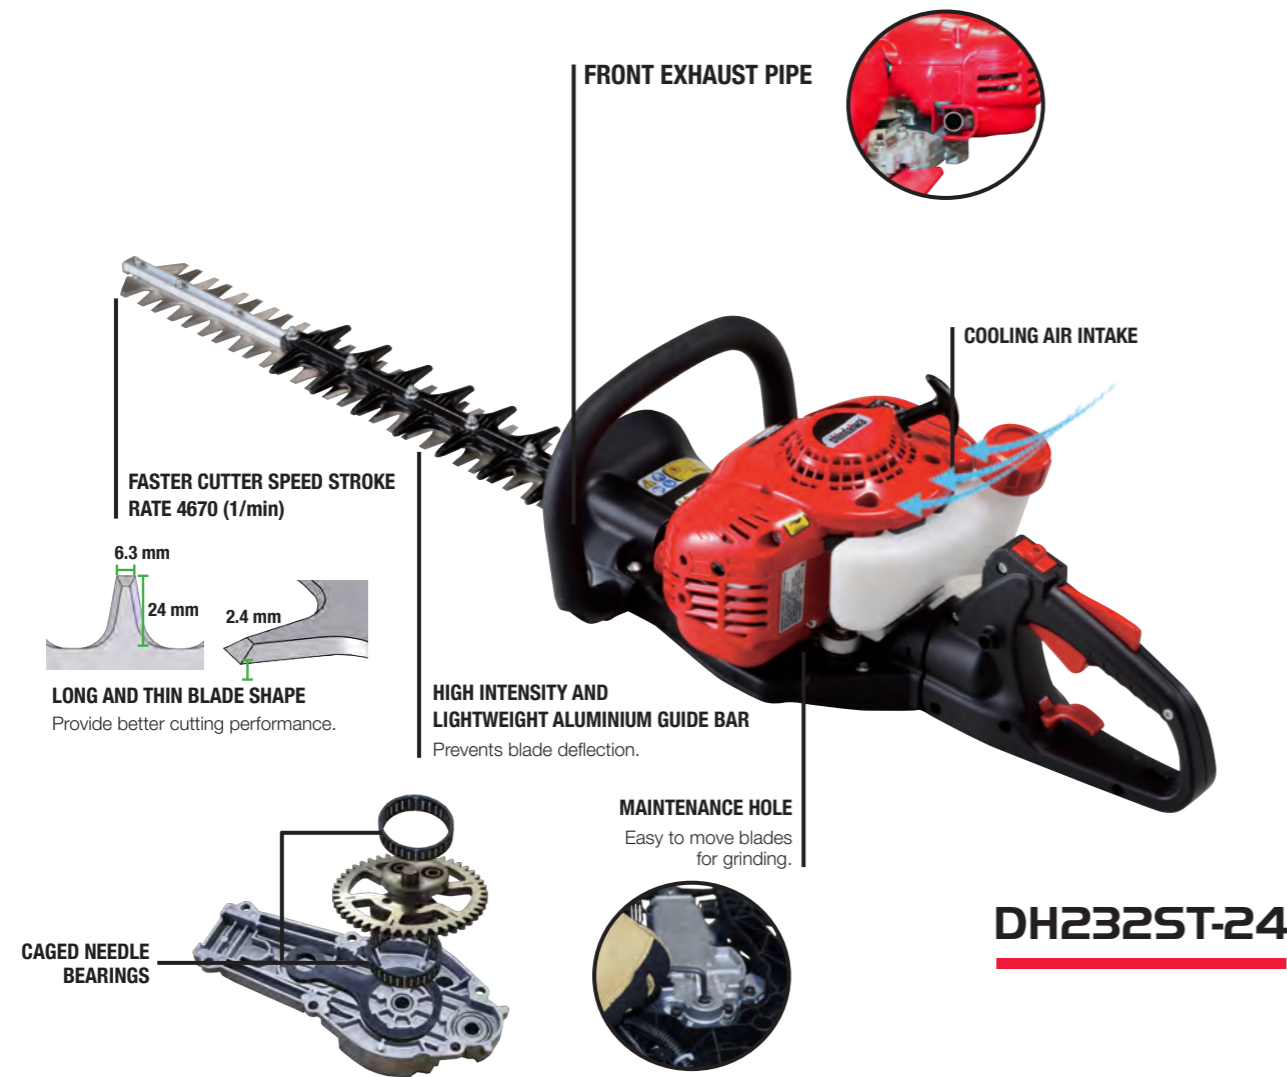


HEDGE TRIMMERS



DH202





Engine displacement: 21.2cm³ // Output: 0.6kW / 0.8ps // Dry weight: 4.5kg // Cutting length: 534mm





DH165ST





Engine displacement: 21.2cm³ // Output: 0.6kW / 0.8ps // Dry weight: 5.1kg // Cutting length: 639mm



DH185ST






Engine displacement: 21.2cm³ // Output: 0.6kW / 0.8ps // Dry weight: 5.3kg // Cutting length: 744mm



DH232ST-24

Engine displacement: 21.2cm³ // Output: 0.57kW / 0.78ps // Dry weight: 5.0kg // Cutting length: 501mm




HEDGE TRIMMERS SHAFTED



SHORT REACH AHS236S-LW

Engine displacement: 21.2cm³ // Output: 0.7kW / 1.0ps // Dry weight: 5.9kg // Cutting length: 519mm // Overall length: 1749mm





LONG REACH AH236S-LW

Engine displacement: 21.2cm³ // Output: 0.7kW / 1.0ps // Dry weight: 6.2kg // Cutting length: 519mm // Overall length: 2407mm

Foldable arms (AH236S-LW)

W-angle adjustment system works per 15 degrees with 10-positions. (AH236S-LW and AHS236S-LW)

POLE PRUNER



PT262S

Engine displacement: 25.4cm³ // Output: 1.0kW / 1.4ps // Dry weight: 7.9kg // Overall length: 2716-3704mm

MULTI-TOOL SYSTEM

M262S

Engine displacement: 25.4cm³ // Output: 1.0kW / 1.4ps //
Dry weight^{*1}: 4.8kg // Length^{*2}: 1038mm



ATTACHMENT SPECIFICATIONS

M262S	TRIMMER/ BRUSHCUTTER	HEDGE TRIMMER		POWER PRUNER [®]	TILLER CULTIVATOR	EDGER	PROSWEEP™	EXTENSION
	MTA-TB	MTA-AHS-HD	MTA-AH-HD	MTA-PP/S	MTA-TC	MTA-LE/S	MTA-PS	MTA-3EXT
Dry weight (kg)	1.5 ^{*1}	2.1	2.6	1.8 ^{*2}	2.3	2.3 ^{*4}	5.3	1.2
Length (mm)	815 ^{*1}	966	1637	1206 ^{*3}	907	783 ^{*4}	797	1000
Drive shaft diameter (mm)	6.1	6.1	6.1	6.1	6.1	6.1	6.1	6.1
Main pipe diameter (mm)	25	25	25	25	25	25	25	25
Gear reduction ratio	1.36	4.6	4.6	1.53	42.75	2.07	42.75	–
Cutting length (mm)	–	536	536	–	–	–	–	–
Cutter pitch (mm)	–	35	35	–	–	–	–	–
Applicable bar length (cm / inch)	–	–	–	25 / 10	–	–	–	–
Saw chain pitch (inch)	–	–	–	3/8	–	–	–	–
Cutting blade length (mm)	–	–	–	–	–	197	–	–
Culti rotor diameter (mm)	–	–	–	–	220	–	–	–
Culti rotor width (mm)	–	–	–	–	161	–	–	–
Maximum sweeping width (mm)	–	–	–	–	–	–	598	–

*1: Without cutting attachment and shield. *2: Without guide bar and saw chain. *3: With standard 25cm guide bar and saw chain. *4: Without blade.

M243	TRIMMER ATTACHMENT	HEDGE TRIMMER ATTACHMENT		POLE PRUNER ATTACHMENT	LAWN EDGER ATTACHMENT	POWER BROOM ATTACHMENT
	SBA-TX24	SBA-AH2422-LW	SBA-AHS2422-LW	SBA-P24	SBA-LE24	SBA-PS24
Configuration	BASIC	BASIC	BASIC	BASIC	BASIC	EU
Dry weight (kg)	1.18 ^{*2}	2.3	1.9	1.99 ^{*3}	1.98 ^{*5}	5.2 ^{*5}
Length (mm)	836	1459	843	1870 ^{*3}	793	480
Drive shaft diameter (mm)	6.0	6.0	6.0	6.0	6.0	6.0
Main pipe diameter (mm)	24.0	24.0	24.0	24.0	24.0	24.0
Gear reduction ratio	1.29	6.14	6.14	1.06	1.36	40.0
Cutting length (mm)	–	519	519	–	–	–
Cutter pitch (mm)	–	31	31	–	–	–
Applicable bar length (cm / inch)	–	–	–	20, 25, 30 / 8, 10, 12	–	–
Saw chain pitch (inch)	–	–	–	3 / 8	–	–
Cutting blade length (mm)	–	–	–	–	197	–
Max. sweeping width (mm)	–	–	–	–	–	575
Applicable power head	M230 / M243 / M2510					

*1: Unit without attachment. *2: Without cutting attachment and shield. *3: Without guide bar and saw chain. *4: With 25cm guide bar and saw chain. *5: Without cutting blade.

BLOWERS

OVERVIEW

Whatever nature throws at you, with a Shindaiwa blower in your hand, you can be sure to give as good as you get. Leaves lie thick on paths and walkways, yet your Shindaiwa blasts away debris wherever you tread, with ease, power and agility. Fire it up. Strap yourself in. Rely on Shindaiwa.



HIGH PERFORMANCE
AIR VOLUME 768 m³/h
AIR SPEED 76.2 m/sec



ROTATIONAL CONTROL DESIGN
Reduces gyro effect on user's wrist for operator comfort.

THROTTLE WITH CRUISE CONTROL
Allows operator to lock throttle at a variety of settings.

NEW SHOULDER HARNESS ATTACHMENT POINTS
Allow use of shoulder harness to support weight of unit and reduce user fatigue.

TOOL-LESS AIR FILTER COVER

POSI-LOCK

EZ-LOCK SYSTEM



DOUBLE-GRID DESIGN
Reduces intake clogging and provides more consistent unit performance.

25.4 cm³ PROFESSIONAL-GRADE, 2ST ENGINE
Provides greater blowing to get your job done faster.

EB262



BLOWERS **HANDHELD**



EB252

Engine displacement: 25.4cm³ // Output: 0.9kW / 1.2ps //
Dry weight^{*1}: 3.9kg // Air volume^{*2}: 768m³/h //
Max. air speed: 76.2m/sec



EB262

Engine displacement: 25.4cm³ // Output: 0.9kW / 1.2ps //
Dry weight^{*1}: 4.4kg // Air volume^{*2}: 774m³/h //
Max. air speed: 76.7m/sec



SHRED 'N' **VAC**[®]




EBS256S

Engine displacement: 25.4cm³ // Output: 0.79kW / 1.07ps //
Dry weight^{*1}: 5.8kg // Air volume^{*2}: 600m³/h //
Max. air speed: 84.9m/sec



^{*1}: Unit with standard blower pipes, empty tank. ^{*2}: With standard pipes.



BLOWERS **BACKPACK**



EB770

Engine displacement: 63.3cm³ // Output: 3.1kW / 4.2ps //
Dry weight^{*1}: 11.0kg // Air volume^{*2}: 1290m³/h //
Max. air speed: 104.6m/sec



EB810

Engine displacement: 79.9cm³ // Output: 4.2kW / 5.7ps //
Dry weight^{*2}: 11.9kg // Air volume^{*2}: 1819m³/h //
Max. air speed: 94.5m/sec



^{*1}: Unit with standard blower pipes, empty tank. ^{*2}: With standard pipes.



SPRAYERS

OVERVIEW

Shindaiwa's commercial grade sprayers deliver precision and convenience for all spraying tasks. They feature lightweight UV-resistant tanks, ergonomic grips, heavy duty wands, and piston pumps with VITON™ seals. All sprayers are supplied with four nozzles.



SP23IH

Capacity: 7.5L
Pressure Rating: 45 PSI



SP40IBP

Capacity: 15L
Pressure Rating: 90 PSI



SP50IBP


Capacity: 18.9L
Pressure Rating: 90 PSI



CHAINSAW ACCESSORIES

GUIDE BAR & SAW CHAIN REFERENCE CHART

Shindaiwa bars and chains are specifically matched to get the most out of every saw. The chart is sorted by model name and includes the appropriate length bar and chain along with the link count, gauge and pitch.

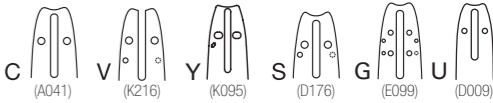

*Y mount guide bar can also be used on Mount type V models.

Model	Gauge	Pitch	GUIDE BAR							SAW CHAIN		
			LENGTH	MOUNT	TYPE	PART NUMBER	BAR TYPE	NOSE TYPE	DRIVE	SAW CHAIN	PART NUMBER	STANDARD
251Ts 251TCs	0.050	3/8	20	C	C20S91-35SA- ST	X120-000040	Laminate	Sprocket	35	91PX	X220-000020	
			25		C25S91-40SL- ST	X121-000081			40		X221-000100	EU, TR
			30		C30S91-47ML- SC	X122-000351			47		X222-000140	
	0.043	1/4	20		C20HA4-52CL- SD	X100-000080	Solid	Hard	52	A4S	X200-000040	EU
			25		C25HA4-60CL- SD	X101-000220			60		X201-000040	EU
251TCs	0.050	1/4	20	C	C20H25-52CL- SD	X100-000051	Solid	Hard	52	25AP	X200-000000	
			25		C25H25-60CLD SD	X101-000121			60		431610-10030	EU
280Ts	0.050	3/8	25	C	C25S91-40SL- ST	X121-000081	Laminate	Sprocket	40	91PX	X221-000100	EU
			30		C30S91-47ML- SC	X122-000351			47		X222-000140	
	0.043	1/4	20		C20HA4-52CL- SD	X100-000080	Solid	Hard	52	A4S	X200-000040	
			25		C25HA4-60CL- SD	X101-000220			60		X201-000040	
280TCs	0.050	1/4	25	C	C25H25-60CLD SD	X101-000121	Solid	Hard	60	25AP	431610-10030	EU
	20		C20HA4-52CL- SD		X100-000080	52			X200-000040			
	0.043		25		C25HA4-60CL- SD	X101-000220	60	X201-000040				
362Ts	0.050	3/8	30	C	C30S91-47ML- SC	X122-000351	Laminate	Sprocket	47	91PX	X222-000140	EU
			35		C35S91-53ML- SC	X123-000561			53		X223-000130	EU
		1/4	30		C30H25-68CL- SD	X102-000100	Solid	Hard	68	25AP	431611-10030	
									68	25A	X202-000010	
									76	25AP	431612-10030	
									76	25A	X203-000000	
251Ws	0.050	3/8	20	C	C20S91-35SA- ST	X120-000040	Laminate	Sprocket	35	91PX	X220-000020	
			25		C25S91-40SL- ST	X121-000081			40		X221-000100	
			30		C30S91-47ML- SC	X122-000351			47		X222-000140	EU
	0.043	1/4	20		C20HA4-52CL- SD	X100-000080	Solid	Hard	52	A4S	X200-000040	
			25		C25HA4-60CL- SD	X101-000220			60		X201-000040	
			20		C20SA4-52CL- SD	X120-000080	Laminate	Sprocket	52		X200-000030	
25	C25SA4-60CL- SD	X121-000210	60	X201-000030								
305s	0.050	3/8	30	C	C30S91-47ML- SC	X122-000351	Laminate	Sprocket	47	91VXL	X222-000130	EU
			35		C35S91-53ML- SC	X123-000561			53		X223-000080	EU
341AC	0.043	3/8	35	C	C35S90-52SA- ST	X123-000690	Laminate	Sprocket	52	90PX	X223-000150	EU
	0.050		30		C30S91-47ML- SC	X122-000351			47	91PX	X222-000140	
									91VXL	X222-000130		
			35		C35S91-53ML- SC	X123-000561			53	91PX	X223-000130	
									91VXL	X223-000080		
		40	C40S91-58AL- ST	X124-000730	58	91PX	X224-000070					
						91VXL	X224-000030					
361WS	0.050	3/8	40	C	C40S91-58AL- ST	X124-000730	Laminate	Sprocket	58	91VXL	X224-000030	KR

Model	Gauge	Pitch	GUIDE BAR							SAW CHAIN			
			LENGTH	MOUNT	TYPE	PART NUMBER	BAR TYPE	NOSE TYPE	DRIVE	SAW CHAIN	PART NUMBER	STANDARD	
362Ws	0.050	3/8	30	C	C30S91-47ML- SC	X122-000351	Laminate	Sprocket	47	91PX	X222-000140		
									47	91VXL	X222-000130	EU	
			35		C35S91-53ML- SC	X123-000561				53	91PX	X223-000130	
									53	91VXL	X223-000080	EU	
			40		C40S91-58AA- ST	X124-000211				58	91PX	X224-000070	
									58	91VXL	X224-000030		
		1/4*1	30	C30H25-68CL- SD	X102-000100	Solid	Hard	68	25AP	431611-10030			
			35	C35H25-76CL- ST	X103-000150			68	25A	X202-000010			
								76	25AP	431612-10030			
								76	25A	X203-000000			
410 410EC	0.050	0.325	38	Y	Y38S20-64ML- SD	X123-000680	Laminate	Sprocket	64	95TXL	X243-000020		
			45		Y45S20-72ML- SD	X125-000450			72		X245-000060		
			38	B	B38S95-64ML- SB	X123-000770			64		X243-000020	EU	
			45		B45S95-72ML- SB	X125-000520			72		X245-000060		
431SX	0.050	0.325	33	Y	Y33R20-56ML- SD	X122-000490	Solid	Sprocket	56	95TXL	X242-000010	EU	
			35		Y35R20-60ML- SD	X123-000720			60		X243-000010	EU	
			40		Y40R20-68ML- SD	X124-000780			68		X244-000110	EU	
			45		Y45R20-72AL- SD	X125-000500			72		X245-000060	EU	
451s	0.058	0.325	33	Y	Y33S21-56ML- SD	X122-000400	Laminate	Sprocket	56	21BPX	431713-30231		
			38		Y38S21-64ML- SD	X123-000630			64		431721-30231	EU	
			45		Y45S21-72ML- SD	X125-000400			72		431717-30231	EU	
			50		Y50S21-80AL- SD	X126-000330			80		431712-30231		
			38		Y38R21-64AA- ST	X123-000660	Solid	Sprocket (X160-000150)	64		431721-30231		
			45		Y45R21-72AA- ST	X125-000430			72		431717-30231		
			50		Y50R21-80AA- ST	X126-000340			80		431712-30231		
			33		Y33S20-56ML- SD	X122-000420			Laminate		Sprocket	56	X242-000010
	38	Y38S20-64ML- SD	X123-000680	64	X243-000020								
	45	Y45S20-72ML- SD	X125-000450	72	X245-000060								
	50	Y50S20-80AL- SD	X126-000360	80	X246-000140								
	33	B33S95-56ML-SB	X122-000550	56	X242-000010								
	38	B38S95-64ML-SB	X123-000770	64	X243-000020								
	452s	0.058	0.325	45	B45S95-72ML-SB	X125-000520	72	X245-000060					
33				C33S21-56MA- SB	X122-000282	Laminate	Sprocket	56	21BPX	431713-30231			
33				C33S21-56AA- ST	X122-000291			56					
38				C38S21-64AA- AT	X123-000411			64		431721-30231			
40				C40S21-66MA- SB	X124-000461			66		X244-000041			
45	C45S21-72AA- SB	X125-000152	72	431717-30231	KR								
493	0.050	0.325	50	Y	Y50S20-80AL- SD	X126-000360	Laminate	Sprocket	80	95TXL	X246-000140		
			33	B	B33S95-56ML- SB	X122-000550			56		X242-000010		
			38		B38S95-64ML- SB	X123-000770			64		X243-000020	EU	
			45		B45S95-72ML- SB	X125-000520			72		X245-000060	EU	
501sx	0.050	0.325	40	Y	Y40R20-68ML- SD	X124-000780	Solid	Sprocket	68	95TXL	X244-000110		
			45		Y45R20-72AL- SD	X125-000500			72		X245-000060		
			50		Y50R20-80AL- SD	X126-000440			80		X246-000140		
	0.058	0.325	40	V	V40R21-68AA- SD	X124-000681		Sprocket (X160-000090)	68	21BPX	431711-38331	EU	
			45		V45R21-72AA- SD	X125-000341			72		431717-30231	EU	
			50		V50R21-80AA- SD	X126-000281		80		431712-30231	EU		
601sx	0.058	3/8	45	S	S45R73-64AA- SD	X125-000271	Solid	Sprocket (X160-000080)	64	73LPX	X265-000060	EU	
									73EXL	X265-000070			
			50		S50R73-72AA- SD	X126-000201			72	73LPX	X266-000060	EU	
									73EXL	X266-000090			
			60		S60R73-84AA- SD	X128-000061		84	73LPX	X268-000040			
								73EXL	X268-000060				
731sx	0.058	3/8	45	U	U45R73-68AA- SD	X125-000480	Solid	Sprocket (X160-000080)	68	73EXL	X265-000090		
									73LPX	X265-000080			
			50		U50R73-72AA- SD	X126-000420			72	73EXL	X266-000090	EU	
									73LPX	X266-000060			
			60		U60R73-84AA- SD	X128-000140			84	73EXL	X268-000060	EU	
									73LPX	X268-000040			
			70		U70R73-92AA- SD	X130-000070		92	73EXL	X270-000080	EU		
								73LPX	X270-000050				

ADDITIONAL CHAINSAW ACCESSORIES


Additional spike for right side of saw for more control while cutting.

Model	Spike	Bolt
341AC	C304-000000	V805-000000
280Ts / 280TCs	C304-000070	-



Debris shield reduces the amount of palm fibres, pine needles and other small debris from getting inside the engine.

DEBRIS SHIELD



For 362Ts



For 362Ws



(Part# X160-000080)

REPLACEABLE NOSE KIT

Part# X160-000080
Part# X160-000090
Part# X160-000150

Check chainsaw guide bar and chain reference chart to find appropriate kit for your model.

Model	Part#
362Ts	A127-000500
362Ws	A127-000490



TRIMMER & BRUSHCUTTER

ACCESSORIES

Maximise your trimming and brushcutting performance with Shindaiwa's complete line of trimmer heads, brushcutter blades and other accessories. From easy loading Speed-Feed nylon cutting head to our high performance steel brush blades, Shindaiwa offers the right accessory for your task. Just like our trimmers, all of our trimmer and brush cutter accessories use commercial-quality components that are built to withstand daily, professional use.

TAP & FEED NYLON HEADS



Diameter: 2.0mm
Length: 2.0m

GI37 100

Part# X047-000552

Diameter: 2.0mm
Length: 3.0m

GI37 500

Part# X047-000561

Diameter: 3.0mm
Length: 2.0m

F4

Part# X047-000260

Diameter: 3.0mm

Z5

Part# X047-000741 (10mm LH)

Diameter: 3.3mm
Length: 1.5mx 2pcs.

B6

Part# X047-001190

SPEED-FEED®

Our patented revolutionary Speed-Feed trimmer heads take the hassle out of refilling your trimmer head and are the easiest loading tap-to-advance heads available.

SF400/S1

Item#SF400/S1

Step1. Line-up Arrows

Step2. Feed Line

Step3. Twist Top Disc

CUTTING HEADS REFERENCE CHART




Standard ● Option ◇		TAP-FEED HEAD					SPEED-FEED®		RAPID-LOADER™	
		G137 100	G138 500	Z5		B6	SF400	SF500	RL-25/S	RL-35/S
		X047-000551	X047-000560	X047-000740	X047-001180	X047-001190	SF400/S1	SF500/S	C6000257	C6000256
F226S	L	●								
C226S	U		◇				◇		◇	
T226S	L		●				◇		◇	
C252	U						◇		●	
T252	L						◇		●	
C263S	U						●		◇	
T263XS	L						●		◇	
C263TS	U				◇		●		◇	
T263TXS	L				◇		●		◇	
C281TS	U						◇		●	
T281TS	L						◇		●	
C303TS	U						●	●	◇	
T303TS	L						●	●	◇	
C361T	U				●		◇	●		◇
T361T	L				●		◇	●		◇
B410S	U							◇		◇
T410S	U							◇		
B410TS	U					●		◇		◇
T410TS	L					●		◇		◇
B410S-LW	U							◇		●
B450R	U			◇						◇
B451	U									◇
B510S	U							◇		◇
BP302T	L							◇	●	
BP510S	L				●			◇		◇
MTA-TB	L						●		◇	

TRIMMER & BRUSHCUTTER

ACCESSORIES

METAL BLADE REFERENCE CHART

Standard ● Option ◇

			3-CUTTER METAL BLADE			4-CUTTER METAL BLADE	8-CUTTER METAL BLADE
			X405-000320	X040-000080	X405-000151	X405-000330	X405-000350
Blade diameter (mm)			230	250	255	255	
Blade thickness (mm)			3.0	2.2	3.0	2.2	2.0
							
C226S	U	-	●			◇	◇
T226S	L	-	◇			◇	◇
C263S	U	-	●				
T263XS	L		◇				
C263TS	U		◇				
T263TXS	L		◇				
C303TS	U				◇	◇	◇
T303TS	L				◇	◇	◇
C361T	U				◇	◇	◇
T361T	L				◇	◇	◇
B410TS	U	-			◇	◇	◇
T410TS	L	-			◇	◇	◇
B410S-LW	U				◇	◇	◇
B410S	U	-			●	◇	◇
T410S	L	-			◇	◇	◇
B450R	U	10mm LH			◇	◇	◇
B451	U				◇	◇	◇
B510S	U	-			●	◇	◇
BP302T	L		◇				
BP510S	L	-			◇	◇	◇
MTA-TB	L		◇				

HARNESS



ERGONOMIC HARNESS

Part# C062-000560



ERGO PRO

Part# C062-000621



HEDGE TRIMMER ACCESSORIES

These protectors prevent the blades from contact with buildings, fences or the ground without interfering with blade performance.



TIP GUARD

Fits DH221
Part# P021-049511



TIP GUARD

Fits DH165ST, DH185ST, DH202
Part# P021-049521

POLE PRUNER ACCESSORIES

GUIDE BAR & CHAIN

Shindaiwa bars and chains are specifically matched to get the most out of every pruner. The chart shows you appropriate bar length and chain along with the link count, gauge, and pitch.

Model	Gauge (in)	Pitch (in)	GUIDE BAR					SAW CHAIN		
			LENGTH (CM)	DESCRIPTION	PART NUMBER	BAR TYPE	NOSE TYPE	DRIVE LINKS	OREGON TYPE	PART NUMBER
P230S SBA-P24/EU #65002 ATT-P230	0.043	3/8	25	25RT43B-3/8SD	X121-000091	Laminate	Sprocket	39	90PX	X221-000130
			30	30RT43B-3/8SD	X122-000301	Laminate	Sprocket	44	90PX	90PX44CQ
PT262S	0.050	3/8	30	S12A0CD3744	X122000330	Laminate	Sprocket	44	91VXL	X222-000110

ADDITIONAL ACCESSORIES

	HEDGE TRIMMER	4' EXTENSION
	PPA-AH-HD	999464-00023
PT262S	◇	◇

*Extension is only usable with chain saw attachment.



HEDGE TRIMMER PPA-AH-HD

Cutting length: 536mm
Item# 28350252



4' EXTENSION

Length: 1200mm
Item# C9500496



SAFETY GEAR



SAFETY HELMET SET

Part# PT000201



FACE PROTECTOR

82003: Item# C9500480



*3 Unit with vacuum pipes, empty tank. *4 Unit with blower pipes.

BLOWER ACCESSORIES



SHOULDER STRAP

Item# C9500141



HIP BELT

Part# C64400024
Part# P021051530



BACK STRAP

Part# C651000140

Standard Option	BLOWER ACCESSORY CHART			
	SHOULDER STRAP	HIP BELT	BACK STRAP	
●	C9500141	P021051530	C644000240	C651000140
◇	◇			
EB252	◇			
EB262	◇			
EB770		◇	●	●
EB810			●	

SPECIFICATIONS

CHAINSAWS	TOP HANDLE SAWS	CHAINSAWS							
	280Ts	305s	341AC	362Ws	431sx	451s	501sx	601sx	731sx
Configuration	EU	EU	EU	EU	EU	EU	AUS, EU	EU	EU
Engine displacement (cm³)	26.9	30.5	34.4	35.8	42.9	45.0	50.2	59.8	73.5
Output (kW / ps)	1.07 / 1.46	1.1 / 1.5	1.5 / 2.1	1.49 / 2.03	2.3 / 3.1	2.3 / 3.1	2.57 / 3.50	3.2 / 4.4	4.1 / 5.6
Dry weight* (kg)	3.0	4.0	3.8	3.8	4.3	5.0	4.7	6.3	6.8
Fuel tank capacity (mL)	240	250	280	320	400	480	500	650	800
Chain oil tank capacity (mL)	160	260	230	230	270	330	280	300	360
Fuel consumption at maximum engine power (L/h)	0.68	0.68	0.85	0.86	1.24	1.19	1.54	1.81	2.3
Priming pump	○	○	○	○	-	○	-	-	○
Ignition system	CDI	CDI	CDI	CDI	CDI	CDI	CDI	CDI	CDI
Start-assist system	Soft start	Soft start	Soft start	Soft start	Soft start	Soft start	Decomp	Decomp	Decomp
Chain brake	Inertia	Inertia	Inertia	Inertia	Inertia	Inertia	Inertia	Inertia	Inertia
Choke w/ automatic fast idle release	○	○	-	○	○	○	○	○	○
Chain tensioner	Side	Side	Side	Side	Side	Side	Side	Side	Side
Saw chain pitch (inch)	3/8	3/8	3/8	3/8 (1/4)	0.325	0.325	0.325	3/8	3/8
Guide bar gauge (inch)	0.050	0.050 (0.043)	0.05 (0.043)	0.050	0.050	0.050	0.058	0.058	0.055
Applicable bar length (cm / inch)	20, 25, 30 / 8, 10, 12	30, 35 / 12, 14	30, 35, 40 / 12, 14, 16	30, 35, 40(30,35)/ 12, 14, 16(12,14)	33, 35, 40, 45 / 13, 14, 16, 18	33, 38, 45, 50 / 13, 15,18, 20	40, 45, 50 / 16, 18, 20	45, 50, 60 / 18, 20, 24	45, 50, 60, 70 / 18, 20, 24, 28
Vibration² Front handle / Rear handle (m/s²)	3.9 / 4.2	4.1 / 6.8	4.1 / 5.0	5.9 / 6.3	3.3 / 3.1	2.6 / 2.8	5.2 / 5.4	4.2 / 5.3	4.2 / 3.5
Sound pressure level³ (dB(A))	99.3	97.9	101.1	99.3	103.1	100.2	103.6	101.6	106.8
Sound power level⁴ (dB(A))	108.1	107.7	110.9	109.3	113	111.9	113.5	113.4	116.9

*1: Without guide bar and saw chain.
*2: Measured in accordance with ISO 22867. Uncertainty(K): 1.3m/s²
*3: Measured in accordance with ISO 22868. Uncertainty(K_{iso})=1.5dB(A)
*4: Measured in accordance with ISO 22868. Uncertainty(K_{iso})=1.0dB(A)
*5: Without cutting attachment.
*6: Measured in accordance with ISO 22867. Uncertainty(K)=3.3m/s²
*7: Measured in accordance with ISO 22868. Uncertainty(K_{iso})=2.5dB(A)
*8: Measured in accordance with ISO 22868. Uncertainty(K_{iso})=2.5dB(A)

POLE PRUNER	POLE PRUNER
	PT262S
Configuration	EU
Engine displacement (cm³)	25.4
Output (kW / ps)	1.0 / 1.4
Dry weight*⁵ (kg)	7.9
Overall length (mm)	2716-3704
Fuel tank capacity (mL)	600
Fuel consumption at maximum engine power (L/h)	0.61
Chain oil tank capacity (mL)	200
Start assist system	Soft start
Telescoping shaft system	○
Optional extension shaft (feet)	4
Guide bar length (cm / inch)	30 / 12
Guide bar gauge (inch)	0.050
Saw chain pitch (inch)	3/8
Vibration Left handle / Right handle (m/s)⁶	6.2 / 7.2
Sound pressure level (dB(A))⁷	93.8
Sound power level (dB(A))⁸	107.6

TRIMMERS / BRUSHCUTTERS

TRIMMERS / BRUSHCUTTERS		CURVED SHAFT TRIMMERS	TRIMMERS / BRUSHCUTTERS						TRIMMERS / BRUSHCUTTERS						BACKPACK BRUSHCUTTERS
		F226S	T226S	C226S	T236TS	T263SX	C263SX		T303TS	C303TS	C361T	B410S	B410TS	B510S	BP510S
Configuration		EU	EU	EU	EU	EU	EU		EU	EU	EU	EU	EU	EU	EU
Handle type		L	L	U	L	L	U		L	U	U	U	U	U	L
Engine displacement (cm³)		21.2	21.2	21.2	21.2	25.4	25.4		30.5	30.5	36.3	41.5	41.5	50.2	50.2
Output (kW / ps)		0.71 / 0.97	0.71 / 0.97	0.71 / 0.97	0.71 / 0.97	1.04 / 1.41	1.04 / 1.41		1.3 / 1.8	1.3 / 1.8	1.43 / 1.94	1.78 / 2.42	1.78 / 2.42	2.16 / 2.94	2.16 / 2.94
Dry weight*¹ (kg)		4.3	4.7	4.9	5.1	5.6	5.8		6.0	6.3	6.6	8.5	8.7	9.0	12.0
Fuel tank capacity (mL)		400	400	400	440	600	600		710	710	850	690	690	690	1070
Fuel consumption at maximum engine power (L/h)		0.45	0.45	0.45	0.45	0.61	0.61		0.72	0.72	0.92	1.05	1.05	1.23	1.23
Carburettor		Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm		Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm	Diaphragm
Start-assist system		Soft start	Soft start	Soft start	ES-Start	Soft start	Soft start		Soft start	Soft start	Decomp	Soft start	Soft start	Soft start	Soft start
Drive shaft type		Flexible	Flexible	Flexible	Solid	Solid	Solid		Solid	Solid	Solid	Solid	Solid	Solid	Solid
Drive shaft diameter (mm)		6.1	6.15	6.15	6.0	7.0	7.0		7.0	7.0	7.0	8.0	8.0	8.0	8.0
Main pipe (mm)		25.0	25.0	25.0	25.0	25.0	25.0		25.0	25.0	25.0	28.0	28.0	28.0	28.0
Gear reduction ratio		1.00	1.36	1.36	1.62	1.36	1.36		1.62	1.62	1.62	1.33	2.08	1.33	1.33
Standardised nylon head	Type	G137 100	G138 500	-	SF400	SF400	SF400		SF400	SF400	Z5 M10L	-	B6 M10L	-	Z5 M10L
	Item number	X047-000552	X047-000561	-	SF400/S1	SF400/S1	SF400/S1		SF400/S1	SF400/S1	X047-001180	-	X047-001190	-	X047-001180
Standardised metal blade	Type	-	-	3-cutter metal blade	-	-	3-cutter metal blade		-	-	-	3-cutter metal blade	-	3-cutter metal blade	-
	Item number	-	-	X405-000320	-	-	X405-000320		-	-	-	X405-000151	-	X405-000151	-
Vibration Left handle*² / Right handle (m/s²) Metal blade		-	-	3.7 / 2.9	-	-	3.6 / 4.1		-	-	-	3.2 / 2.9	-	3.4 / 3.2	-
Vibration Left handle*² / Right handle (m/s²) Nylon head		4.9 / 5.4	3.8 / 5.7	-	4.6 / 3.9	4.1 / 4.7	3.2 / 3.8		2.9 / 4.6	4.2 / 3.2	5.7 / 4.1	-	4.5 / 3.4	-	5.3 / 4.0
Sound pressure level*³ (dB(A)) Blade / Nylon head		- / 91.9	- / 91.9	92.9 /-	- / 92.9	- / 92.7	93.0 / 93.1		- / 98.1	- / 98.3	- / 93.8	96.9 /-	- / 96.6	98.2 /-	- / 97.5
Sound power level*⁴ (dB(A)) Blade / Nylon head		- / 105.0	- / 103.4	104.2 /-	- / 106.2	- / 107.9	106.3 / 108.0		- / 111.7	- / 112.2	- / 107.6	112.2 /-	- / 110.3	113.2 /-	- / 110.6

*1: Without cutting attachment.
*2: Measured in accordance with ISO 22867. Uncertainty(K)=0.8m/s²(Metal Blade), 1.2m/s²(Nylon head)
*3: Measured in accordance with ISO 22868. Uncertainty(K_{iso})=0.8dB(A)(Metal Blade), 1.5dB(A)(Nylon head)
*4: Measured in accordance with ISO 22868. Uncertainty(K_{iso})=1.6dB(A)(Metal Blade), 2.1B(A)(Nylon head)

SPECIFICATIONS

HEDGE TRIMMERS

	DOUBLE-SIDED HEDGE TRIMMERS				SHAFTED HEDGE TRIMMERS	
	DH202	DH232ST-24	DH165ST	DH185ST	AH236S-LW	AHS236S-LW
Configuration	EU	EU	EU	EU	EU	EU
Engine displacement (cm³)	21.2	21.2	21.2	21.2	21.2	21.2
Output (kW / ps)	0.6 / 0.8	0.57 / 0.78	0.58 / 0.79	0.58 / 0.79	0.71 / 0.97	0.7 / 1.0
Dry weight (kg)	4.5	5.0	5.1	5.3	6.2	5.9
Fuel tank capacity (mL)	390	390	390	390	440	440
Fuel consumption at maximum engine power (L/h)	0.44	0.40	0.40	0.40	0.45	0.45
Start-assist system	-	Soft start	Soft start	Soft start	Soft start	Soft start
Rotating handle	-	○	○	○	-	-
Anti-vibration system	-	○	○	○	-	-
Cutter type	Double	Double	Double	Double	Double	Double
Cutting length (mm)	534	501	639	744	519	519
Cutter pitch (mm)	35	35	35	35	30	30
Cutter clearance	Adjustable	Adjustment-free	Adjustable	Adjustable	Adjustable	Adjustable
Stroke rate (Cuts/min)	3600	4700	3600	3600	3900	3900
*1Vibration levels (m/s²) Front handle / Rear handle (m/s²)	6.4 / 9.7	4.1 / 6.1	3.6 / 4.8	3.9 / 4.8	4.6 / 3.7	5.1 / 4.8
*2Sound pressure level (dB(A))	96.1	99.7	98.8	98.6	95.5	94.3
*3Sound power level (dB(A))	106.5	107.5	105.7	105.4	106.7	106.2

BLOWERS/ SHRED ‘N’ VAC®		HANDHELD BLOWERS		BACKPACK BLOWERS		SHRED ‘N’ VAC®
		EB252	EB262	EB770	EB810	EBS256S
Configuration		EU	EU	EU	EU	EU
Engine displacement (cm³)		25.4	25.4	63.3	79.9	25.4
Maximum engine power (kW / ps)		0.91 / 1.24	0.91 / 1.24	3.05 / 4.15	4.2 / 5.7	0.79 / 1.07
Dry weight*4 (kg)		3.9	4.4	11.0	11.9	5.8
Fuel tank capacity (mL)		550	600	2020	2560	470
Fuel consumption at maximum engine power (L/h)		0.52	0.65	1.87	2.18	0.57
Air volume*5 (m³/h)		768*6	774*6	1290*6	1819	600*6
Max air speed*5 (m/sec)		76.2*6	76.7*6	104.6*6	94.5	84.9*6
Start-assist system		-	-	-	-	Soft start
Throttle setting device		○	○	○	○	○
Standardised nozzle type	A	Round straight	Round straight	Round straight	Round straight	Vacuum
	B	-	Flat straight	Round bent	-	Flat straight
Vacuum kit		-	-	-	-	○
Vibration levels (m/s²)*7 Nozzle TypeA / Nozzle TypeB / Nozzle TypeA: Rear handle		9.9	A:6.6 / B:7.1	A:2.8 / B:1.9	2.4	A:5.1 / B:8.1 / 10.0
Sound pressure levels*8 (dB(A)) Nozzle TypeA / Nozzle TypeB		94.9	A:93.5 / B:93.4	A:98.8 / B:98.2	106.6	88.8 / 87.3
Sound power levels*9 (dB(A)) Nozzle TypeA / Nozzle TypeB		105.8	A:104.9 / B:104.6	A:108.8 / B:108.6	114.3	S:102.6 / 102.1

*1: Measured in accordance with ISO 10517. Uncertainty(K)=5.0m/s²
*2: Measured in accordance with ISO 10517. Uncertainty(K_{uv})=2.5dB(A)
*3: Measured in accordance with ISO 10517. Uncertainty(K_{uv})=2.5dB(A)
*4: Unit with blower pipes A , empty tank.
*5: With standard pipe A.
*6: Measured in accordance ISO 22868.
*7: Measured in accordance with EN 15503. Uncertainty(K)=5.0m/s²(HANDHELD), 4.1m/s²(VACUUM), 1.7m/s²(BACKPACK)
*8: Measured in accordance with EN 15503. Uncertainty(K_{uv})=2.5dB(A)
*9: Measured in accordance with EN 15503. Uncertainty(K_{uv})=2.5dB(A)
*10: Unit without attachment.
*11: Unit without spraying hose and nozzle.
*12: Unit without specified cutting blade.

PRODUCT ICONS

SOFT START

Spring-assisted starting system for easier starting.

DIGITAL CONTROLLED CDI

Capacitor Discharge Ignition system for easy starting and smooth acceleration.

HEAVY DUTY AIR FILTER

Heavy duty air filter for reduced maintenance and less downtime.

SUPER ANTI-VIBRATION SYSTEM

Super anti-vibration system for reduced vibration.

G-FORCE ENGINE AIR PRE-CLEANER™

G-FORCE Engine Air Pre-Cleaner for reduced air filter maintenance.

SPIKE

Spike as standard.

OPTIONAL SPIKE

Spike as optional.

AUTOMATIC FAST IDLE

Integrated choke and fast idle with trigger release for easy starting.

SIDE ACCESS CHAIN TENSIONER

Side access chain tensioner for quick chain adjustments.

VENTILATED BACK PAD

Ventilated back pad for operator cooling.

ROTATIONAL CONTROL

Delivers a pull away from the operator to counter the gyro effect, with no loss of blowing force.

U HANDLE

Model with U type handle.

LOOP HANDLE

Model with loop type handle.

HIGH TORQUE

High torque gear for more efficient work.

ROTATABLE HANDLE

Rotatable rear handle for comfortable operation in all positions.

ADJUSTABLE CUTTER CLEARANCE

Cutter clearance is adjustable.

ADJUSTMENT-FREE

Cutter clearance is adjustment-free.

TIP GUARD

Tip guard prevents blade contact with fences or buildings.

POSI-LOC PIPE SYSTEM

Posi-loc for a secure connection.

EZ-LOCK SYSTEM

EZ lock for secure pipe-to-housing connection.

AUTO CHOKE

Auto choke.

shindaiwa®



Proudly Distributed By:
Briggs & Stratton Australia Pty Ltd.
Locked Bag 5004, St Clair, NSW 2759
Phone 1800 356 632

www.BRIGGSandSTRATTON.com
www.shindaiwa-australia.com.au